




Pleated Sediment Filter for Cartridge Tank	Model #	Nominal Micron Rating
	CF3400-PL01	1 Micron
	CF3400-PL05	5 Micron
	CF3400-PL20	20 Micron
	CF3400-PL50	50 Micron

Pleated Sediment Filters

for water filtration applications

Pleated sediment filters deliver high-performance filtration with a flexible design that adapts to a variety of systems.

With dual O-ring configurations, these filters fit securely into appropriate cartridge tanks, ensure easy installation, and a reliable seal

Cartridge tank filters are available with four different micron ratings providing flexibility to meet specific filtration needs.

Dual o-rings can be placed in upright or downright position for compatibility with other manufacturers' units.




Opposite end of filter



Certified to NSF/ANSI 42 and NSF/ANSI/CAN 372.

Filter Performance - CTO Sediment/Carbon Filters

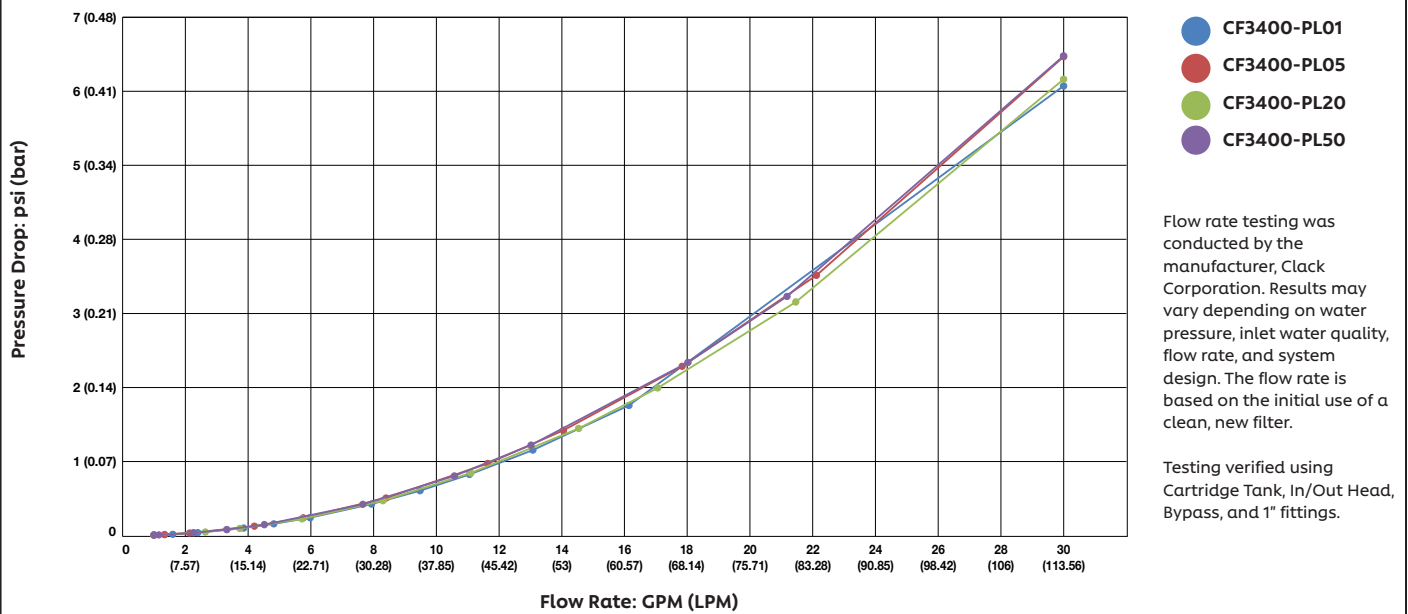

Flow rate testing was conducted by the manufacturer, Clack Corporation. Results may vary depending on water pressure, inlet water quality, flow rate, and system design. The flow rate is based on the initial use of a clean, new filter.

Testing verified using Cartridge Tank, In/Out Head, Bypass, and 1" fittings.